


3100-BOS-R1 System

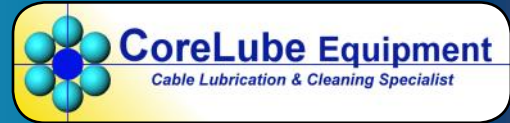

Accommodates Wire Rope Sizes From: .472" (12mm) to 3" (76mm)

Designed to apply self penetrating Light Oils up to a NLGI #0 Grease.

ADVANTAGES

- High rope speed lubrication.
- Even lubricant coverage.
- No lubricant wastage.
- Eliminates or reduces lubricant fling-off.
- One brush size covers a large range of rope sizes. Eliminates the need for a rubber seal for every size of wire rope.
- Bushings remove exterior contaminants.
- Cables deformities can be run through the collar.
- Bushings snap into the collar without tools.
- Operates at any angle or direction.
- The same pump can fit all sizes of containers from a drum to a pail.
- The collars are extremely strong and lightweight.
- Easy to use.

3100-BOS Collar



Accommodates Wire Rope Sizes
From: .472" (12mm) to 3" (76mm)



The wire ropes shown above have been coated with the same lubricant and system.



3100-BOS-R1 System



Accommodates Wire Rope Sizes From: .472" (12mm) to 3" (76mm)

Designed to apply self penetrating Light Oils up to a NLGI #0 Grease.

FIGHT CORROSION by keeping the wire ropes clean.



Air Wiper

Air Wiper Option Available



3100-BOS Collar

Groove Cleaner Option

Helix Groove Cleaner Option Available



Mine Hoist Rope




Case Option



Small, Medium & Large Helix Groove Cleaners Available up to 5." (127mm)

Number of outer strands available:
(3 Outer Strands) to (18 Outer Strands)


(3) Sizes Available

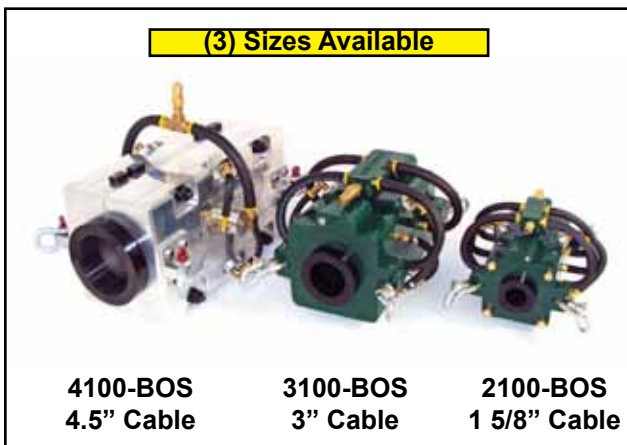

4100-BOS
4.5" Cable

3100-BOS
3" Cable

2100-BOS
1 5/8" Cable

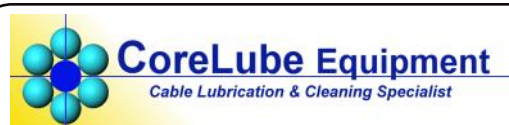

Phone: 403-529-9645 Fax: 403-527-1369
E-mail: sales@corelube.com
www.corelube.com