

HELIX GROOVE CLEANER THRUST BLOCK



LEADING TECHNOLOGY IN WIRE ROPE CLEANING.

CoreLube Equipment's Helix Groove Cleaners are designed to remove contaminants from the valleys between the strands of wire rope.

The cleaner works by rotating with the helical lay of the wire rope.

Thrust Block




(HGC) Helix Groove Cleaners

Thrust Block Assembly



Thrust Block

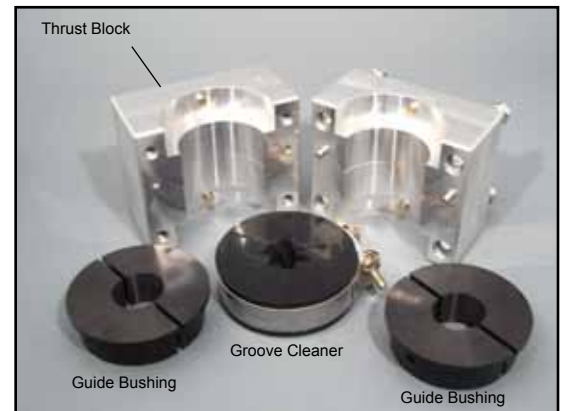

THRUST BLOCK MAXIMUM WIRE ROPE DIAMETER:

Maximum Diameter 2.75" 70mm

The purpose of the thrust block is to give our groove cleaners a flat centralize surface to rotate against.

There are two eye bolts to anchor the thrust block.

All Corelube's lubrication systems come standard with a guide bushing and do not require the thrust block.



A1600 Grease Collar

Web: www.corelube.com
E-mail: sales@corelube.com
Phone: 403-529-9645